



GE
Lighting



A+
energy class

100
lumens/watt

LED Diffuser Downlighter DDTW6-1540-7SB-STC 93057440

Product information

GE Lighting introduces the new standard range of LED Diffuser Downlighters. There are a selection of sizes and colour temperature options to meet customer requirements. With this new range lighting can be upgraded in key segments such as office, commercial buildings, retail backoffice, hospitality.

Application areas

- Hospitality
- Office
- Retail

GE Lighting 93057440 DDTW6-1540-7SB-STC

This luminaire contains built-in LED lamps.

LED

The LED lamps cannot be changed in the luminaire

874/2012

Product data

Mounting type	Recessed
Dimensions	180 x180 x 81mm
Energy efficiency class (EEC)	A+
IP Rating	20
Certifications	CE
Weight [kg]	0,32
DIALux description	GE - LED Diffuser Downlighter - 1500lm - 15W - 4000K - 80CRI - 93057440[SKU] - Recessed
Body colour	White

Performance data

Operating Voltage	220-240V
Ambient Temperature [°C]	-10 to +40
Rated efficacy [lm/W]	100
Current [A]	75mA
Total system power	15
Nominal lumens [lm]	1500
Rated lumens [lm]	1500
Rated power [W]	15
Rated life [h]	45 000 / L70
Nominal correlated colour temperature (CCT) [K]	4000
Colour rendering index (CRI) [Ra]	80

Optical data

Nominal beam angle [°]	100+/-15
------------------------	----------


Electrical data

Nominal lamp power factor	0,9
Controllability	Constant Current Driver


Logistic data

Product status	Available
Pack quantity	1

Photometric Data

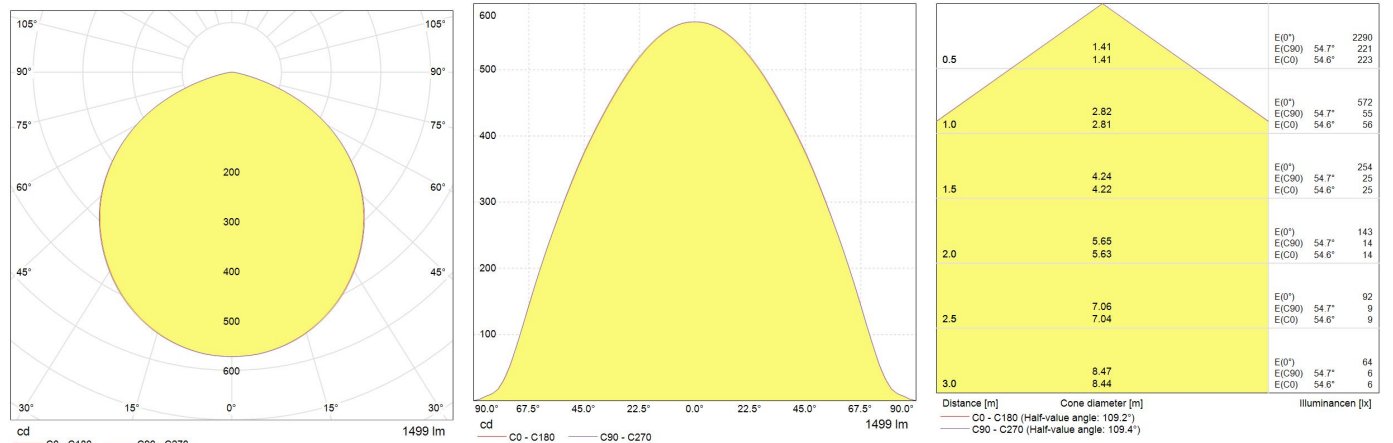

Technical drawing

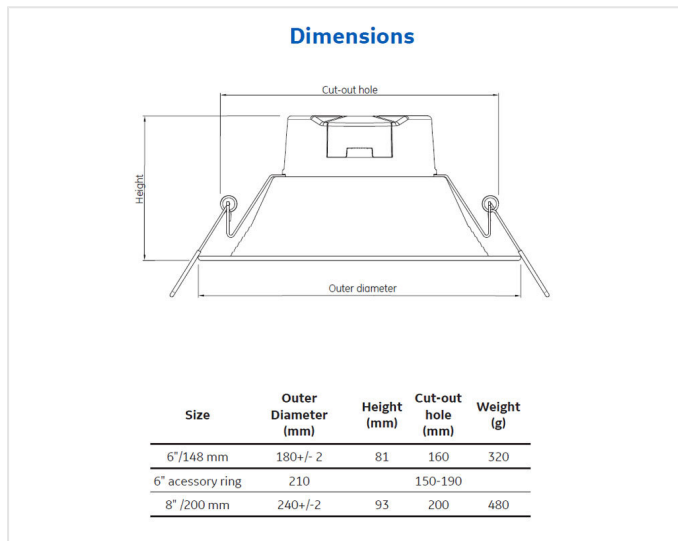

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[LED Diffuser Downlight Datasheet \(PDF\)](#)

[LED Diffuser Downlight Images \(HTTP\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)